

INSTRUMENT CLUSTER BULBS REPLACEMENT 96-A6

INSTRUMENT CLUSTER REMOVAL:



Left screw



Right Screw



Pull the panel out



To the left releasing the guide pin



Left instrument screw



Middle instrument screw



Right instrument screw



Pull out the instrument cluster bottom first.


LOOK BEHIND THE CLUSTER FOR REMOVING THE CONNECTORS.





REMOVE ALL CONNECTORS HOOKED UP TO THE CAR SO WE CAN TAKE OUT THE CLUSTER.



IDENTIFY BULBS FOR EACH DISPLAY.

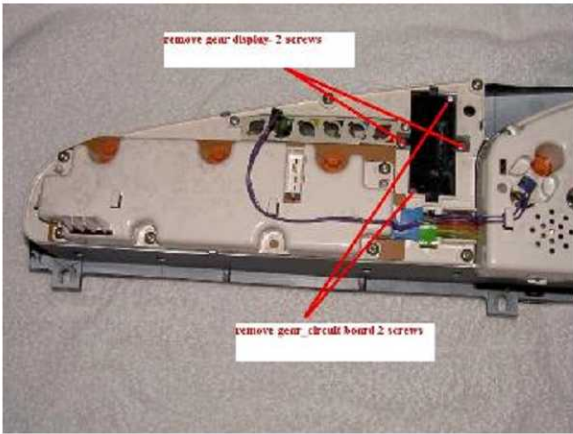

GEAR SELECT DISPLAY

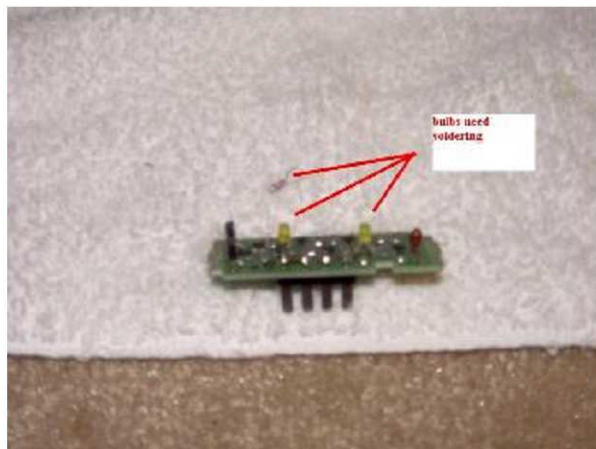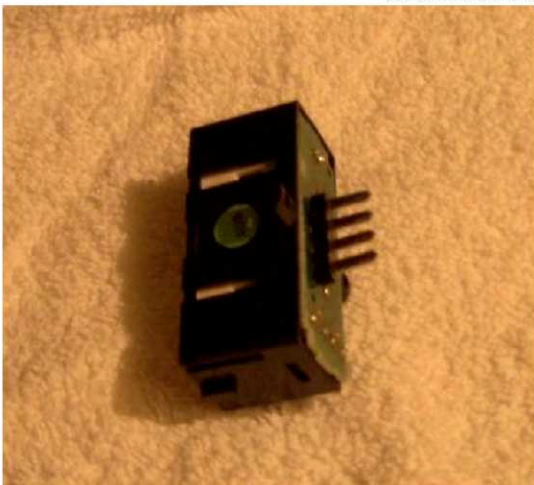


Use soldering iron & solder sucker to remove the bulbs and replace with Radio Shack 7219 Micro Lamp bulbs.




Odometer bulb Orange = 1.1W



Temperature display

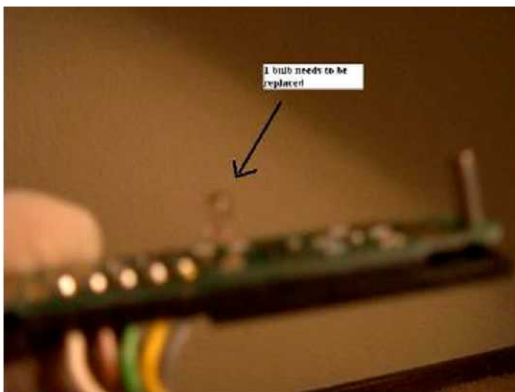

Use soldering iron to remove the bulb and replace.

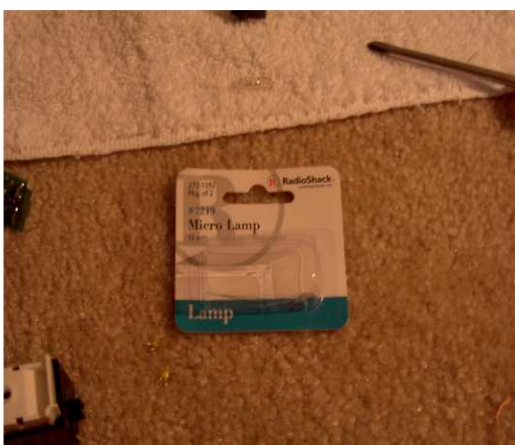

RADIO SHACK 7219 Micro Lamp Package of 2.

